
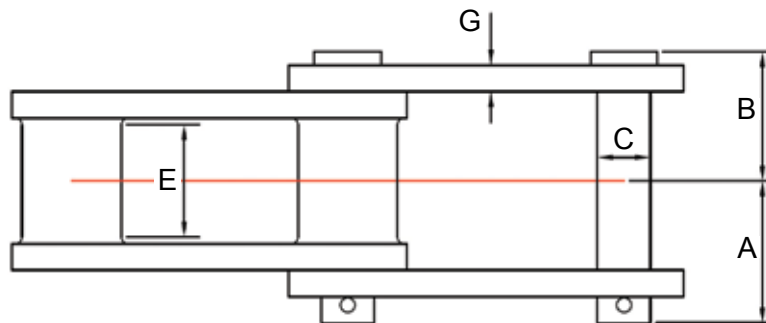


## COMBINATION CHAINS

Cobalt Chains premium combination chains are most commonly used in light-to-medium duty conveying applications where a durable yet cost effective chain is needed. Combination chains are often utilized for stone, gravel, coal and other abrasive materials. They are manufactured with hardened cast block links and heat-treated steel sidebars and pins to withstand the abuse of industrial applications. Our combination chains are designed and fully tested for dimensional consistency, interchangeability, and correct sprocket engagement.

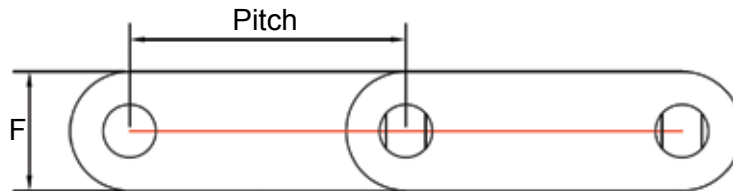

Combination Chains																			
Chain	Pitch		A		B		C		E		F		G		No. of Links in 10ft.	Minimum Ultimate Strength		Weight	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm		lbs	kg	lbs/ft	kg/mtr
CC55	1.631	41.43	0.41	10.32	1.09	27.78	0.38	9.50	0.69	17.46	0.75	19.05	0.19	4.76	74.00	9,000	4,000	2.20	3.28
CC102	4.000	101.60	2.13	53.98	2.25	57.15	0.63	15.88	1.88	47.63	1.50	38.10	0.38	9.50	30.00	24,000	11,900	7.50	11.15
CC110	6.000	152.40	2.06	52.39	2.19	55.56	0.63	15.88	1.88	47.63	1.50	38.10	0.38	9.50	20.00	24,000	11,900	5.90	8.79
CC111	4.760	121.90	2.38	60.33	2.63	66.68	0.75	19.05	2.13	53.98	1.75	44.45	0.38	9.50	24.00	36,000	16,400	9.30	13.87
CC131	3.075	78.10	1.69	42.86	1.94	49.20	0.63	15.88	1.13	28.58	1.50	38.10	0.38	9.50	39.00	24,000	11,900	6.70	10.00
CC132	6.060	153.92	3.19	81.00	3.25	82.55	1.00	25.40	3.13	79.38	2.00	50.80	0.50	12.70	20.00	50,000	22,700	13.10	19.52
CC188	2.609	66.27	1.25	31.75	1.38	34.93	0.50	12.07	0.88	22.22	1.13	28.58	0.25	6.35	46.00	14,000	6,960	3.50	5.22

The tabular dimensions and weights are approximate and are not binding. Design improvements may result in variations from the published figures and verification is recommended.