Bakery Chains

Oven & Proofer Chains

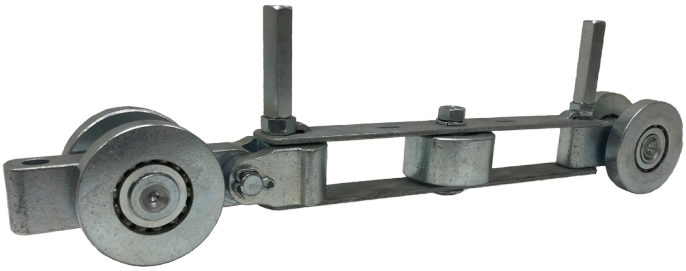

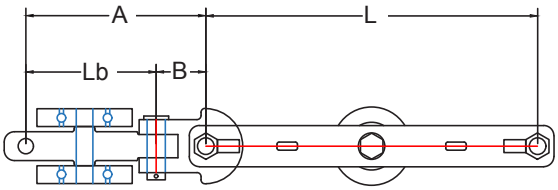

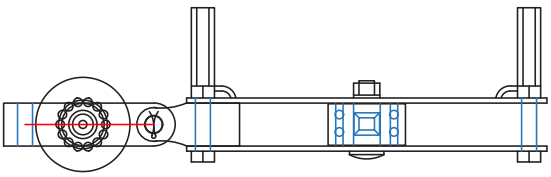

816 Proofer/Oven Chain

Chain	Pitch		A		B		L		Lb		Finish	Weight
	in	mm	in	mm	in	mm	in	mm	in	mm		lbs/ft
CCB816-BTP	12.000	304.83	4.00	101.60	0.84	21.23	8.00	203.23	3.16	80.37	Zinc Plated	3.80
CCB816-BTO	12.000	304.83	4.00	101.60	0.84	21.23	8.00	203.23	3.16	80.37	Black Oxide	3.80

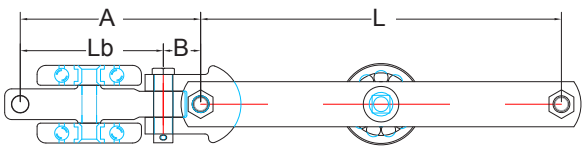

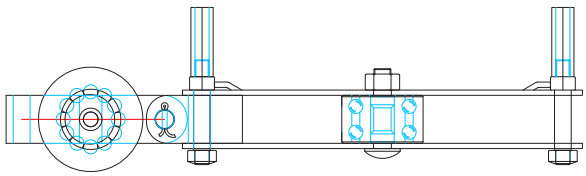

203 Proofer/Oven Chain

Chain	Pitch		A		B		L		Lb		Finish	Weight
	in	mm	in	mm	in	mm	in	mm	in	mm		lbs/ft
CCB203-BTP	12.000	304.80	4.00	101.60	0.83	21.03	8.00	203.20	3.17	80.57	Zinc Plated & Yellow Dichromate	3.70
CCB203-BTO	12.000	304.80	4.00	101.60	0.83	21.03	8.00	203.20	31.7	80.57	Black Oxide	3.70

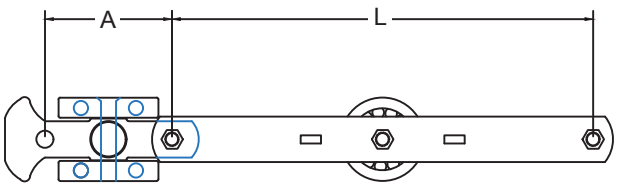

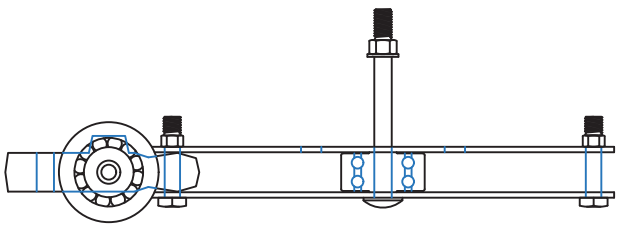

614 Proofer/Oven Chain - Original LS

Chain	Pitch		A		L		Finish	Weight
	in	mm	in	mm	in	mm		lbs/ft
CCB614O-LP	12.000	304.80	2.86	72.80	9.13	232.00	Zinc Plated & Yellow Dichromate	4.80
CCB614O-LO	12.000	304.80	2.86	72.80	9.13	232.00	Black Oxide	4.80

Oven & Proofer Chains

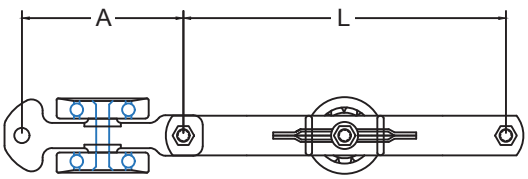

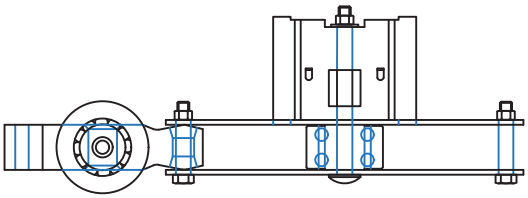

620 Proofer/Oven Chain - New Generation LS								
Chain	Pitch		A		L		Finish	Weight
	in	mm	in	mm	in	mm		lbs/ft
CCB620NG-LP	12.000	304.80	4.00	101.60	8.00	203.20	Zinc Plated & Yellow Dichromate	5.50
CCB620NG-LO	12.000	304.80	4.00	101.60	8.00	203.20	Black Oxide	5.50

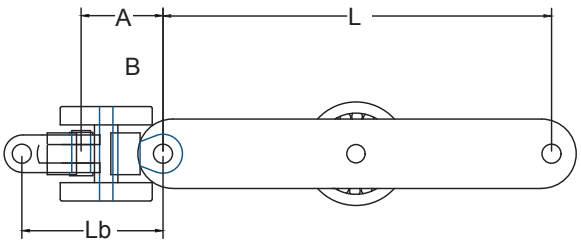

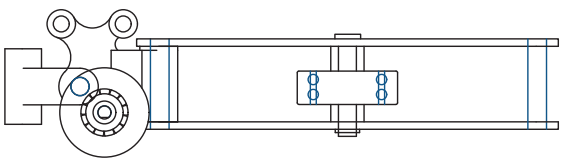

415 Proofer/Oven Chain												
Chain	Pitch		P		A		B		Lb		Finish	Weight
	in	mm	in	mm	in	mm	in	mm	in	mm		lbs/ft
CCB415-SP	12.45	316.30	9.14	232.20	3.31	84.10	1.39	35.30	1.92	48.80	Zinc Plated	4.77
CCB415-SO	12.45	316.30	9.14	232.20	3.31	84.10	1.39	35.30	1.92	48.80	Black Oxide	4.77

Pendants for Lanham

Pendants for Lanham			
Pendant	Material	Height	
		in	mm
CCBP63SS	Stainless Steel	2.48	63
CCBP63ZP	Zinc Plated	2.48	63
CCBP68SS	Stainless Steel	2.68	68
CCBP68ZP	Zinc Plated	2.68	68

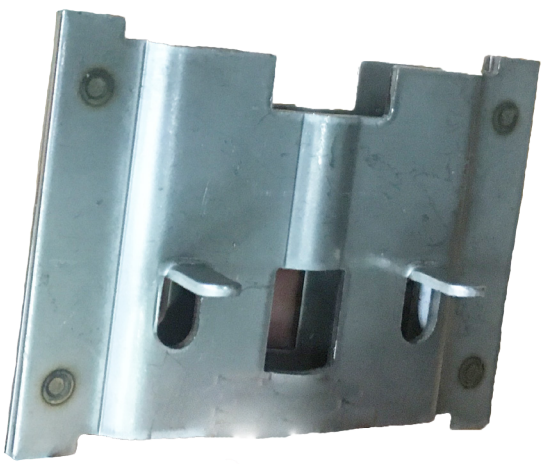

Hollow Pin Oven & Proofer Chains

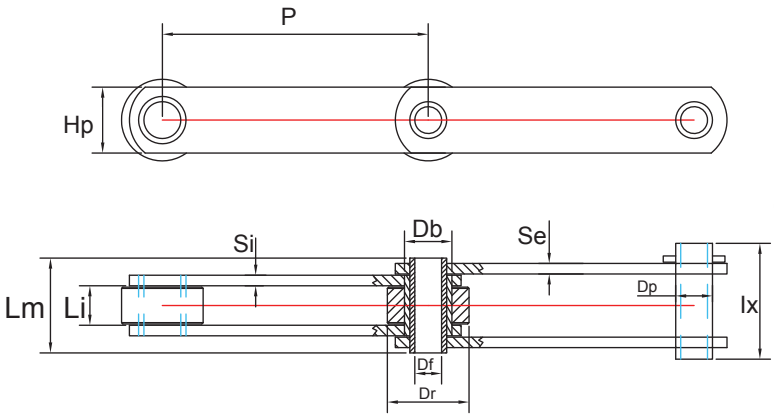

Hollow Pin Proofer Chains												
Chain	P	Li	Dr	Db	Df	Dp	Hp	Si	Se	Breaking Load		Weight
	in									lbs	lbs*	lbs/ft
CHP55/100/P	3.937	0.95	1.87	0.91	0.75	0.43	1.58	0.20	0.20	12,364	24,729	6.38
CHP110/1524/R3/P	6.000	1.02	2.63	1.30	1.06	0.80	1.97	0.20	0.28	24,729	67,443	6.98
CHP110/1778/P	7.000	1.02	3.00	1.30	1.06	0.80	1.97	0.20	0.28	24,729	67,443	6.05
CHP110/2032/P	8.000	1.02	2.63	1.30	1.06	0.80	1.97	0.20	0.28	24,729	67,443	5.71
CHP110/2032/R3/P	8.000	1.02	3.00	1.30	1.06	0.80	1.97	0.20	0.28	24,729	67,443	6.18
CHP160/1270/P	5.000	1.50	3.50	1.50	1.26	0.89	2.36	0.32	0.39	35,969	71,939	13.98
CHP160/1524/P	6.000	1.50	3.50	1.50	1.26	0.89	2.36	0.32	0.39	35,969	71,939	14.85
CHP160/2032/P	8.000	1.50	3.50	1.50	1.26	0.89	2.36	0.32	0.39	35,969	71,939	12.50
CHP160/2032/R5/P	8.000	1.50	3.50	1.50	1.26	0.89	2.36	0.32	0.39	35,969	71,939	14.51

Hollow Pin Oven Chains												
Chain	P	Li	Dr	Db	Df	Dp	Hp	Si	Se	Breaking Load		Weight
	in									lbs	lbs*	lbs/ft
HP110/1524/C1X1/P	6.000	1.02	2.63	1.30	1.06	0.80	1.97	0.28	0.28	24,729	6,7443	6.59
HP160/1524/C1/AX1/P	6.000	1.50	3.50	1.50	1.26	0.89	2.36	0.39	0.39	35,969	71,939	14.85
HP160/1178/C1/AX1/P	7.000	1.50	3.50	1.50	1.26	0.89	2.36	0.39	0.39	35,969	71,939	12.50